



RESIN RIBBON

PERFORMANCE CHARACTERISTICS


- ❖ Maximum durability for harsh environmental labelling chemical drum
- ❖ Highest level of resistance to abrasion, heat, steam and various chemicals
- ❖ Print exceptionally on high end films including polyester, vinyl and polyamide
- ❖ Excellent print resolution

APPLICATIONS:

- ❖ Nursery and timber
- ❖ Medical and pharmaceutical
- ❖ Laboratory
- ❖ Retail
- ❖ Automotive
- ❖ Electronic

FORMULATION TECHNICAL INFORMATION

| | |
|---------------------------------|---------------------------|
| Film thickness | 4.5 microns |
| Total ribbon thickness | 6.2 microns |
| Printing density | 1.00 Macbeth densitometer |
| Ink melting pot | 110 ° C |
| Recommended maximum print speed | 6 inches per second |

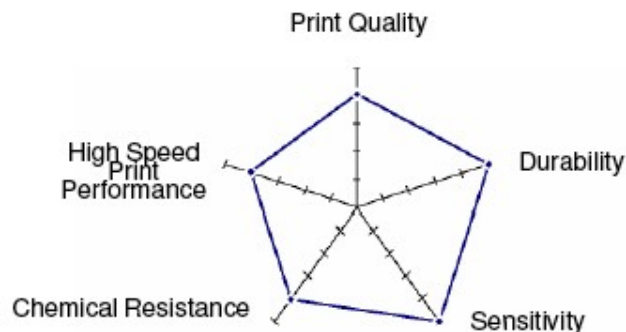

Our recommendations are based on our experience and up-to-date knowledge. As the products are used outside our control, we cannot take the responsibility for any damage which could be caused when using the product. This technical information sheet replaces all earlier ones. All information could be changed without notice.